



Oprema Ravne

PNEVMATIKA, HIDRAVLIKA  
ORODJA IN TEHNOLOŠKE  
LINIJE D. O. O.  
KOROŠKA CESTA 14  
2390 RAVNE NA KOROŠKEM  
SLOVENIJA

T: +386 2 870 7959

T: +386 2 870 7951

F: +386 2 870 7980

www.opremaravne.si

## IN LINE LUBRICATORS MAZ 10( M ), 20( M ), 30( M ), 40( M )

IMAGINE YOUR CAR DRIVING WITHOUT OIL " FOR HOW LONG? "


WITH LUBRICATOR MAZ40 RELIABLE AND LONG TIME  
OPERATION OF YOUR ROCK DRILL IS GUARANTEED.

Lubricator MAZ40 offers maximal protection for rock drill with special  
functions:

- If oil runs out, the compressed air supply automatically closes.
- Safety off function if air disconnects.
- When there is no flow of air through the lubricator, this is not squeezing the oil through the drain hose..


USING OF SIMPLE AND CHEAPER LUBRICATORS WITHOUT SAFETY  
FUNCTIONS CAUSES UNPROPER OR OMITTED LUBRICATION OF  
VITAL PNEUMATIC HAMMER MOVING PARTS AND HEREWITH MANY  
DAMAGES AND CHANGES OF THESE PARTS.

END EFFECT: COSTS ARISING FROM THE EXCHANGE OF PISTON  
AND OTHER PARTS ARE CONSECUTIVE MUCH HIGHER THAN  
COSTS OF LUBRICATOR MAZ40.

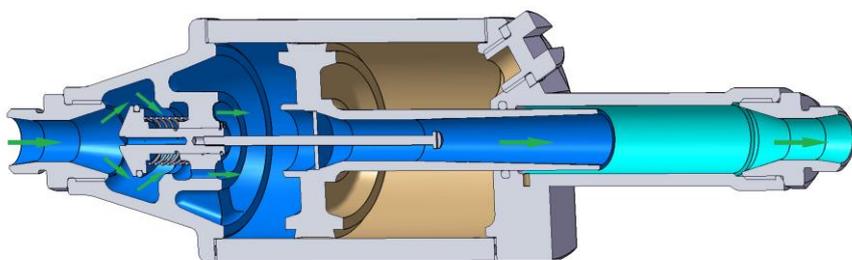

» With oil « drilling- safe for your machine

» No oil « No drilling

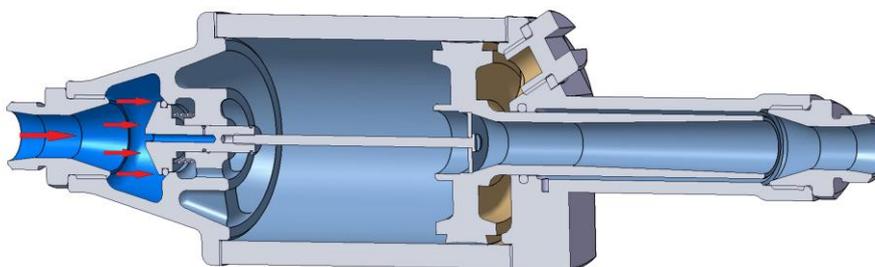

If oil runs out, the compressed air supply automatically closes

Reliable operation is guaranteed

Safety off function if air disconnects

M - steel/metal covered with ATEX certificate for coal mines



Lubricator Order No.	MAZ 10 (M) 9 336 01 (05)	MAZ 20 (M) 9 336 02 (06)	MAZ 30 (M) 9 336 03 (07)	MAZ 40 (M) 9 336 04 (08)
Lenght ( mm )	404	404	404	404
Width ( mm )	128	128	128	128
Weight ( kg )	4,8	4,8	4,8	4,8
Oil quantity i ntank ( l )	0,5	0,5	0,5	0,5
Working pressure ( bar )	4-7	4-7	4-7	4-7
Air flow ( min <sup>-3</sup> )	0,5-1	1-2,5	2,5-4,8	4,8-7
Connection thread ( external )	R3/4"	R3/4"	R1"	R1"

### OPREMA RECOMMEDATION:

MAZ 10 (M) use with: NP100, NP180, CK30

MAZ 20 (M) use with: LRK7, LRK8, SRK12, SRK17

ECO17, ECO20, ECO23, TRK30

MAZ 30 (M) use with: VK23

MAZ 40 (M) use with: MFD90, MFD90MAX, MFD90MAXPLUS  
LPB, LTV